

COMPLETE STUD WELDING

Products • Knowledge • Service • Integrity

SECTION 10

CABLE HANGERS & CLAMPS

FOR INQUIRIES, TO PLACE ORDERS,
SERVICE AND TECHNICAL SUPPORT CONTACT
ANY OF THE FOLLOWING:

OFFICE: 216.904.4008


EMAIL: SALES@COMPLETESTUDWELD.COM

COMPLETE
STUD WELDING
Products • Service • Knowledge • Integrity


Cable Hangers - Crimp Type

CRIMP TYPE - TECHNICAL DETIALS


Catalog No.	Cable Dia. in inches From — To	
JCT 1020	.305	.371
JCT 1040	.375	.531
JCT 1051	.531	.680
JCT 1026	.437	.750
JCT 1027	.680	.900
JCT 1030	.750	1.000
JCT 1031	.900	1.224



Catalog No.	Cable Dia. in inches
JCT 1181	.531




Catalog No.	Cable Dia. in inches From — To	
JCT 2001	.305	.371
JCT 1052	.375	.531
JCT 1162	.531	.680
JCT 2002	.437	.750
JCT 2003	.680	.900
JCT 2004	.750	1.000
JCT 2005	1.000	1.224




Catalog No.	Cable Dia. in inches
JCT 1041	.500
JCT 1042	1.000
JCT 1043	.750
JCT 1044	1.224
JCT 1045	.680

Catalog No.	Cable Dia. in inches From — To	
JCT 1170	.531	.531
JCT 1171	.325	.371



Cable Hangers are available in Mild Steel and Stainless Steel types 304 and 316.



Method of Fastening

1. Weld standard 3/8" dia. stud to overhead deck or bulkhead.
2. Spin desired hanger (crimp, plate or tubular type) onto stud. Secure cable or cables by crimping hanger or banding, depending on type of hanger.


COMPLETE
STUD WELDING
Products • Service • Knowledge • Integrity

JWC & JSC - Cable Clamps - Specifications

JWC & JSC - CABLE CLAMPS - TECHNICAL DETAILS


The Swivel-action locking of screw to band make Snaplock a truly versatile clamp. Snaplock is quickly opened or closed. The quick release feature of Snaplock allows the addition and removal of cables with simple ease and eliminates the "hay-wiring" and "tie-wrapping" done during the initial stages of cable pulling. Snaplock is reusable as opposed to the old method of cable banding.

Swivel Action Worm Drive - JWC

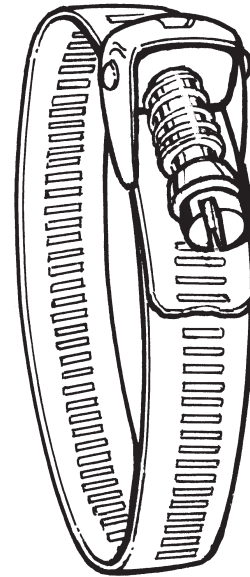

Reference Number	Max. Clamp Diameter	Clamp Length
Full Notching Type JWC		
5612	1.250	4
5620	1.750	5.5
5628	2.250	7
5636	2.750	8.5
5648	3.500	11
5656	4.000	12.5
5672	5.120	16
5688	6.000	18.5
56104	7.120	22
56128	8.620	27
56152	10.000	31.5
56188	12.250	38
56258	15.750	50
Limited Notching Type JSC		
5836	6.000	19.75
5837	7.120	23.125
5838	8.620	28
5839	10.000	31.875
5840	12.000	36
5841	13.000	40
5843	15.000	46

Standard Snaplock - JSC
1/16" hex head screw

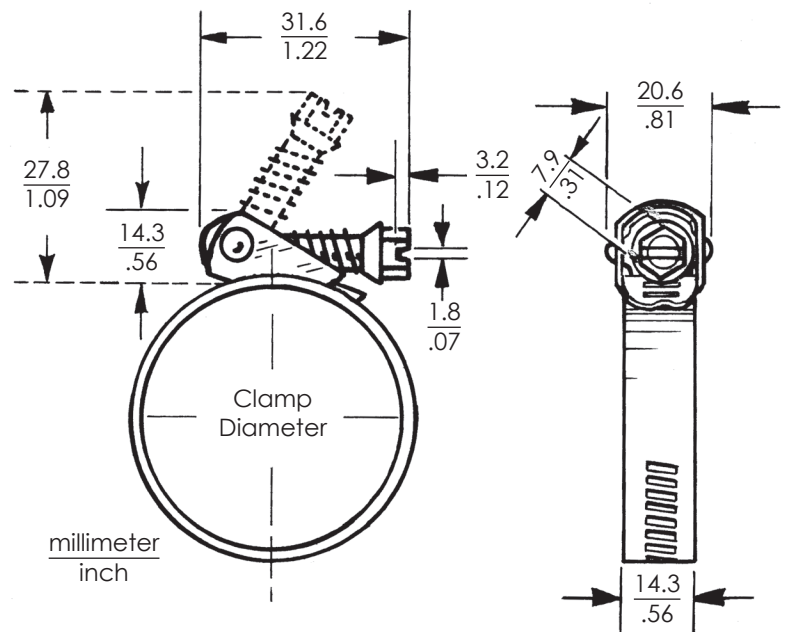

Note, the band and housing are 300 Stainless steel. The 5/16" hex head, slotted screw is mild steel, zinc plated.


COMPLETE
STUD WELDING
Products • Service • Knowledge • Integrity

Cable Hangers - Plate Type

PLATE TYPE


Catalog No.	Length-A in Inches
JPT 15002	2
JPT 15003	3
JPT 15004	4
JPT 15006	6
JPT 15008	8

Bottom Loading

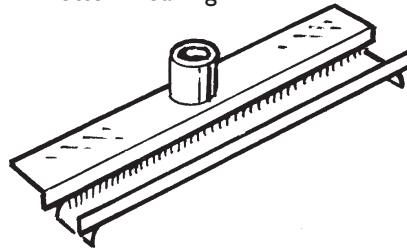

Catalog No.	Length-A in Inches
JPT 16002	2
JPT 16003	3
JPT 16004	4
JPT 16006	6
JPT 16008	8


(Inverted) Top Loading

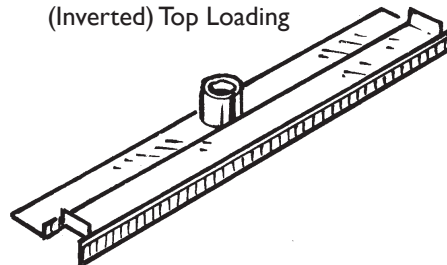


TUBULAR TYPE

Catalog No.	Length-A in Inches
JTT 0150	1.50
JTT 0250	2.50
JTT 0350	3.50
JTT 0450	4.50
JTT 0550	5.50
JTT 0650	6.50
JTT 0750	7.50

7/8" x 3/8" Rectangular

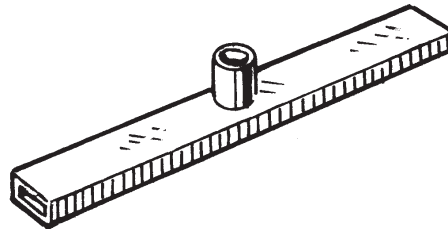

Cable Hangers are available in Mill Steel and Stainless Steel types 304 and 316.



Method of Fastening

1. Weld standard 3/8" dia. stud to overhead deck or bulkhead.
2. Spin desired hanger (crimp, plate or tubular type) onto stud. Secure cable or cables by crimping hanger or banding, depending on type of hanger.

COMPLETE
STUD WELDING
Products • Service • Knowledge • Integrity